



Corian.
CHARGING SURFACE

DUPONT™ CORIAN® CHARGING UNIT: INSTALLATION

INTRODUCTION

This bulletin discusses the installation procedure for the DuPont™ Corian® Charging Unit wireless charging transmitter.

OVERVIEW

The DuPont™ Corian® Charging Unit dual-mode transmitter is compliant with PMA and WPC Qi standards.

The transmitter is tuned for best performance through 8 mm of Corian® solid surface. Instructions for optimum placement and installation are in this bulletin. Due to the precise routing required the installation should be done in the fabrication shop prior to sheet installation.

The DuPont™ Corian® Charging Unit package consists of the transmitter, power cord and transformer. PMA compliant charging rings are purchased separately – as a set of 3 : 1 ring each of micro USB, Apple 30-pin and Apple Lightning® PMA compatible receivers are available separately.

The transmitter has a micro USB port for updating the firmware if necessary.

A. PREPLANNING

A.1. Box Contents

The box will come with the transmitter and the power supply (not pictured here).



Figure A-1: Transmitter

A.2. Available Separately

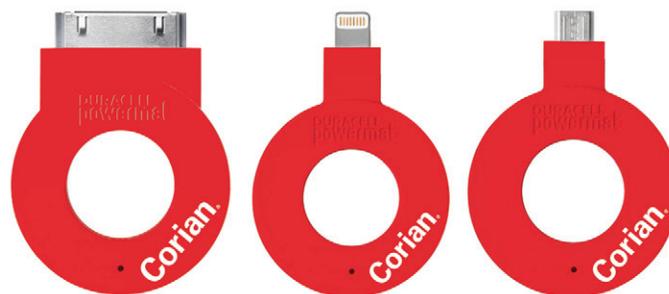


Figure A-2: Adapter rings: Apple Lightning®, Apple 30-pin, micro USB

A.3. Placement

There are several considerations regarding proper placement of the transmitter:

- Avoid putting in proximity to locations where the device being charged may get wet, exposed to excessive heat or any other conditions which may damage the device being charged.
- Do not install next to heat sources (such as ovens) or where heat sources are commonly used (toasters, hobs hot plates, etc.).
- Stay away from edges where charging devices can be easily knocked off the surface.

Work with the customer to determine convenient locations.

The transmitter requires a rectangular space of 82 mm x 92 mm below the work surface. Allow an extra 25 mm distance to any support structure. No metal should be between the transmitter and the surface. The transmitter also requires 36 mm vertical clearance measured from the top surface (24 mm from bottom surface). Avoid placement above heat- or moisture-generating appliances such as dishwashers, warming drawers, wine refrigerators, etc. Verify cabinet/ support measurements before cutting the top. There should be a support strip between the transmitter and any cutouts or the edge of the top.

DUPONT™ CORIAN® CHARGING UNIT: INSTALLATION

The transmitter does generate some heat and ideally is installed such that it shares airspace with the cabinet interior.

If placing above a drawer, make sure there is sufficient clearance, including drawer contents.

Install so that the transmitter will be accessible by the customer. If there is a warranty replacement the customer will need to be able to remove and replace the transmitter. Make sure the power and micro USB ports will be accessible after installation. Plan for power cable routing and mounting of the transformer. The power supply has a 1.2 m DC cable, 111 mm x 51 mm x 36 mm transformer and 1.2 m AC cable. A four-unit power supply (four 1m cables) is available separately.

If more than one transmitter is installed they should be at least 150 mm from each other.



Figure A-3: Left - Power, Center - Micro USB, Right - LED

A.4. Marking Charging Location

Discuss the options for marking the charging spot with the customer. Some may prefer a permanent mark, either a highly visible mark or a subtle mark that blends with the background. A highly visible mark may be preferred in environments where multiple users will be using the device and aren't familiar with the area. Subtle or temporary markings may be more appropriate where there are a limited number of users that will become familiar with the location over time.

Marking options include laser engraving or inlays for permanent marks, and stickers for temporary marks. Laser engraving will leave a slight depression and may be more difficult to clean. For high visibility markings choose a contrasting colour. In commercial environments this may incorporate corporate colour logos. For subtle markings a complementary colour should be used. Translucent White DuPont™ Joint Adhesive is often a good choice for subtle inlays. For particulate colours matching one of the particulates may work well. The uniform shape of the mark will help it stand out when viewed at close distances, but it will blend into the background at greater distances.

A.5. Additional Materials and Equipment

In addition to the transmitter, fabrication will require 100% silicone adhesive, denatured alcohol and a clean cloth. Using a CNC with a flat-tipped end mill bit is highly recommended for accurately cutting the cavity.

Some form of cable management (conduit, clips, etc.) will be necessary.

B. VERIFY TRANSMITTER OPERATION

B.1. Important Testing Guidance

Verify the transmitter is operational before installing by plugging it in. A green LED should blink once.

DO NOT TEST BY PLACING A RECEIVER IN CONTACT WITH THE TRANSMITTER.

The transmitter is optimized for the installation distance, bringing the transmitter and receiver in direct contact may damage the devices. Always test with something nonmetallic of 8 mm thickness in between the transmitter and receiver.

B.2. Firmware Updates

When there is a firmware update, DuPont will make the update available for download. The transmitter is updated by connecting the device to a computer using a USB 2.0 Micro Type-B to USB Standard Type-A cable.

C. SHEET PREPARATION

C.1. Optional Inlay/Laser Engraving

Charging location marking methods that require fabrication should be performed before milling the pocket for the transmitter.

Standard techniques for engraving or creating inlays may be used to identify the charging location. If the customer does not desire a permanent indicator a temporary sticker may be used. The charging spot indicator can be subtle or highly visible depending on the customer's desire. In general, commercial establishments with many customers will want permanent markers. Residential installations where the customer can "learn" the location may opt for temporary stickers.

C.2. Milling Pocket

The wireless power transmitter is optimized for a surface thickness of 8 mm. A CNC is highly recommended for pocket milling as the distance is registered from the face of the sheet, whereas a hand router distance is registered off the back of the sheet, which may induce more variability in remaining sheet thickness.

DUPONT™ CORIAN® CHARGING UNIT: INSTALLATION

The pocket should be milled as a circle of 63.5 mm with remaining material thickness of 8 mm. Use a flat-tipped end mill bit with a 3 mm radius on the tip for a uniform surface in the cavity.

Make sure that once the transmitter is installed there will be clearance for attaching the power plug and that there is access to the micro USB port for potential firmware updates.

D. TRANSMITTER INSTALLATION

D.1. Adhering transmitter to sheet

Remove all dust and shavings. Clean the sheet and flange of the transmitter with a clean cloth dampened with industrial denatured alcohol. Verify the desired orientation of the transmitter so that the power and USB ports will be accessible after installation. The flange will sit slightly above the surface when the coil is in contact with the cavity surface.

The transmitter is attached to the sheet with a 100% silicone adhesive. Place dabs of silicone at each of the four corners. Clear or translucent adhesive is recommended, white is shown here for visibility. Avoid highly contrasting colours, particularly dark adhesive with more translucent, lighter-coloured sheets. There needs to be enough silicone to fill the gap between the flange and the surface. Keep the silicone away from the coil. If for some reason the transmitter will be replaced, removal will be easier if the adhesive is only on the flange and not in the cavity. If desired, small amounts of hot melt adhesive may be placed along opposite sides to hold the transmitter in place while the silicone adhesive cures. The hot melt can be applied at the edges of the flange after the transmitter is placed in the pocket. The transmitter may be held in place with tape or a weight while the silicone cures.

Hot melt adhesive is for temporary bonding only. It is not suitable for long term mounting.



Figure D-1: Transmitter top surface

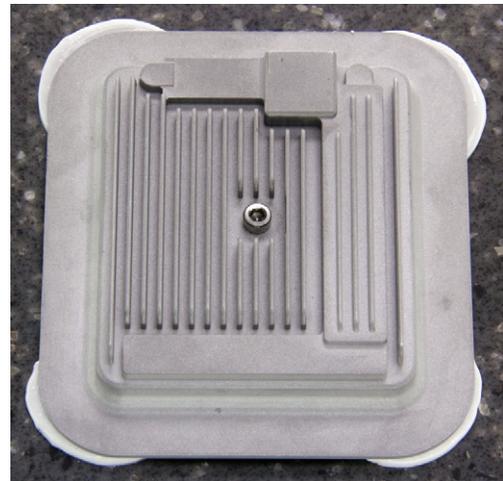


Figure D-3: Transmitter adhered to surface



Figure D-2: 100% Silicone applied to transmitter

¹Where regulations require, alternative solvents are discussed in *DuPont™ Corian® Solid Surface Fabrication/Installation Fundamentals – Approved Cleaning Solvents (K-25701)*



DUPONT™ CORIAN® CHARGING UNIT: INSTALLATION

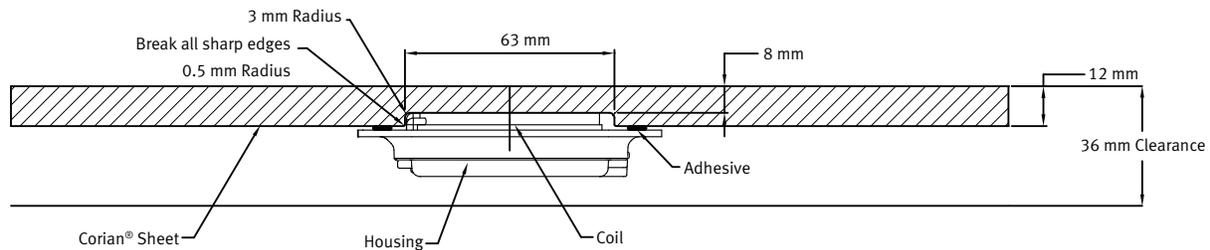


Figure D-4: Installation Summary Schematic (all measurements in mm)

D.2. Wiring

The transmitter is supplied with a power cord consisting of DC and AC wiring connected with a transformer. In many cases an AC power outlet may need to be installed in the cabinetry where the transmitter is to be installed. Local codes must be followed and the AC outlet often must be installed by a licensed electrician.

E. LED INDICATOR

The LED will indicate the current transmitter status.

Off	No power/inactive
Power On	One green flash
Charging	Continuous flashing green
End-of-charge	Solid green
Foreign object detected	Flashing red
Error condition	Solid red

F. TRANSPORTATION

The greatest risk of physical damage to the transmitter will be between transmitter installation and fabricated top installation in the facility. Protect the transmitter during storage and transportation. One option for protecting the transmitter is to cut a cavity large enough to contain the transmitter in a piece of stiff foam. This foam can then be taped over the transmitter for protection.

G. REFERENCES

DuPont™ Corian® Solid Surface Fabrication/Installation Fundamentals – Approved Cleaning Solvents (K-25701)

This information is based on technical data that E. I. du Pont de Nemours and Company and its affiliates ("DuPont") believe to be reliable, and is intended for use by persons having technical skill and at their own discretion and risk. DuPont cannot and does not warrant that this information is absolutely current or accurate, although every effort is made to ensure that it is kept as current and accurate as possible. Because conditions of use are outside DuPont's control, DuPont makes no representations or warranties, express or implied, with respect to the information, or any part thereof, including any warranties of title, non-infringement of copyright or patent rights of others, merchantability, or fitness or suitability for any purpose and assumes no liability or responsibility for the accuracy, completeness, or usefulness of any information. This information should not be relied upon to create specifications, designs, or installation guidelines. The persons responsible for the use and handling of the product are responsible for ensuring the design, fabrication, or installation methods and process present no health or safety hazards. Do not attempt to perform specification, design, fabrication, or installation work without proper training or without the proper personal protection equipment. Nothing herein is to be taken as a license to operate under or a recommendation to infringe any patents. DuPont shall have no liability for the use of or results obtained from such information, whether or not based on DuPont's negligence. DuPont shall not be liable for (i) any damages, including claims relating to the specification, design, fabrication, installation, or combination of this product with any other product(s), an (ii) special, direct, indirect or consequential damages. DuPont reserves the right to make changes to this information and to this disclaimer. DuPont encourages you to review this information and this disclaimer periodically for any updates or changes. Your continued access or use of this information shall be deemed your acceptance of this disclaimer and any changes and the reasonableness of these standards for notice of changes.

© E. I. du Pont de Nemours and Company 2015. The DuPont Oval, DuPont™ and Corian® are trademarks or registered trademarks of E. I. du Pont de Nemours and Company ("DuPont") or its affiliates. All rights reserved.

Apple Lightning® is a registered trademark of Apple, Inc.

K-28310 EMEA/EN 8/15